ADDENDUM NO. 3

IFB #2026-001

Invitation for Bids

Underground Fiber Optic Infrastructure

Fecha del Addendum: November 9, 2026

NOTICE OF CLARIFICATION AND REVISION OF TECHNICAL REQUIREMENTS, MATERIAL SPECIFICATIONS, AND BID DOCUMENT CONSISTENCY

This Addendum forms part of and modifies the above-referenced Invitation for Bids (IFB). All bidders and interested parties shall acknowledge receipt of this Addendum and incorporate its provisions into their bid submissions.

Purpose:

To clarify conduit sizing requirements, remove estimated service drop quantities, correct administrative inconsistencies, and ensure consistency among the IFB, Attachment 4 Price Proposal Form, material compliance requirements, and project documentation.

Revision

The following changes are hereby incorporated into IFB #2026-001.

Revision to HDPE Conduit Size Requirements

The mainline conduit size for the project is hereby clarified and established as follows:

Previous Reference

HDPE conduit (2" and 1.25")

Revised Reference

HDPE conduit (1.5" and 1.25")

The principal underground backbone conduit shall consist of 1.5-inch HDPE conduit unless otherwise identified in the Engineering Plans and Technical Specifications.

The following references are confirmed:

Attachment 4, Item 2.3 – HDPE Conduit Supply and Installation – 1.5"

Attachment 4, Item 2.4 – HDPE Conduit Supply and Installation – 1.25"

Change Order Item CO-3 – Additional HDPE Conduit – 1.5"

Change Order Item CO-4 – Additional HDPE Conduit – 1.25"

Any previous reference to 2-inch HDPE conduit for the project backbone is hereby superseded.

Revision to Service Drop Quantities

Estimated service drop quantities previously included or referenced in the IFB have been removed.

Bidders shall determine service drop requirements, if applicable, based on the engineering plans, project scope, and technical requirements contained in Exhibit A-1 Engineering Plans and Technical Specifications and Exhibit A-2 Scope of Work.

No guaranteed quantity of service drops is provided under this solicitation, and the omission of service drop quantities shall not constitute grounds for adjustment of bid pricing after bid submission.

Revision to Administrative Quantity Reference

Section 4.7.2 of the IFB is revised as follows:

Previous Language

Hand hole supply and installation (unit cost per unit × 149 units)

Revised Language

Hand hole supply and installation (unit cost per unit × 219 units)

This revision aligns Section 4.7.2 with the quantities established throughout the IFB and project documentation.

4. Confirmation of Project Quantities

The Project consists approximately of:

1. 27 route miles of underground fiber optic infrastructure.
2. 219 underground hand holes.
3. 56 pole transition structures.

Bidders shall utilize these quantities together with the engineering plans and specifications when preparing their bids.

Clarification Regarding Attachment 4

Attachment 4 – Price Proposal Form has been updated to reflect the project requirements and material specifications contained in the IFB, including:

1.5-inch HDPE Mainline Conduit.

1.25-inch HDPE Service Drop Conduit.

219 Underground Hand Holes.

56 Pole Transition Structures.

Bidders shall include all labor, supervision, materials, restoration, permitting, traffic control, testing, equipment, transportation, incidentals, and ancillary work necessary to provide a complete and operational system.

Revision to Exhibit A-2 – Scope of Work

Exhibit A-2 – Scope of Work has been revised to remove references to estimated Service Drop quantities and associated Service Drop installation activities.

Bidders shall utilize the revised version of Exhibit A-2 – Scope of Work issued with this Addendum when preparing their bids.

The revisions are intended to align the Scope of Work with the current project requirements, engineering plans, and bid proposal documents.

Any previous references to estimated Service Drop quantities contained within prior versions of the Scope of Work are hereby superseded and shall have no force or effect for purposes of bid preparation or contract pricing.


Clarification

These revisions are being issued solely to improve consistency among the IFB, Attachment 4 Price Proposal Form, and Exhibit A-2 Scope of Work, including the removal of estimated Service Drop quantities, updates to material requirements, and clarification of project quantities. Except as specifically modified herein, no changes are being made to the project scope, contractor qualifications, evaluation criteria, technical specifications, procurement procedures, construction schedule, bonding requirements, insurance requirements, or any other provisions of the IFB.

All Other Terms Remain Unchanged

Except as expressly modified by this Addendum, all terms, conditions, requirements, specifications, instructions, exhibits, attachments, schedules, and provisions of IFB #2026-001 shall remain in full force and effect.

Authorized by: Edsel F. Ruiz

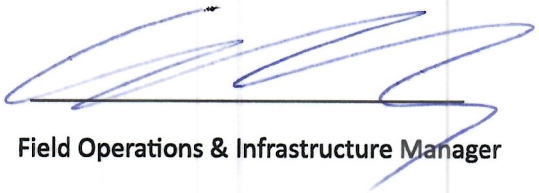

Field Operations & Infrastructure Manager

Company Name: vpnet

Date: 11/9/2026